
WATERPROOF MICROCEMENT

Microröck / Micropool



CEMHER®

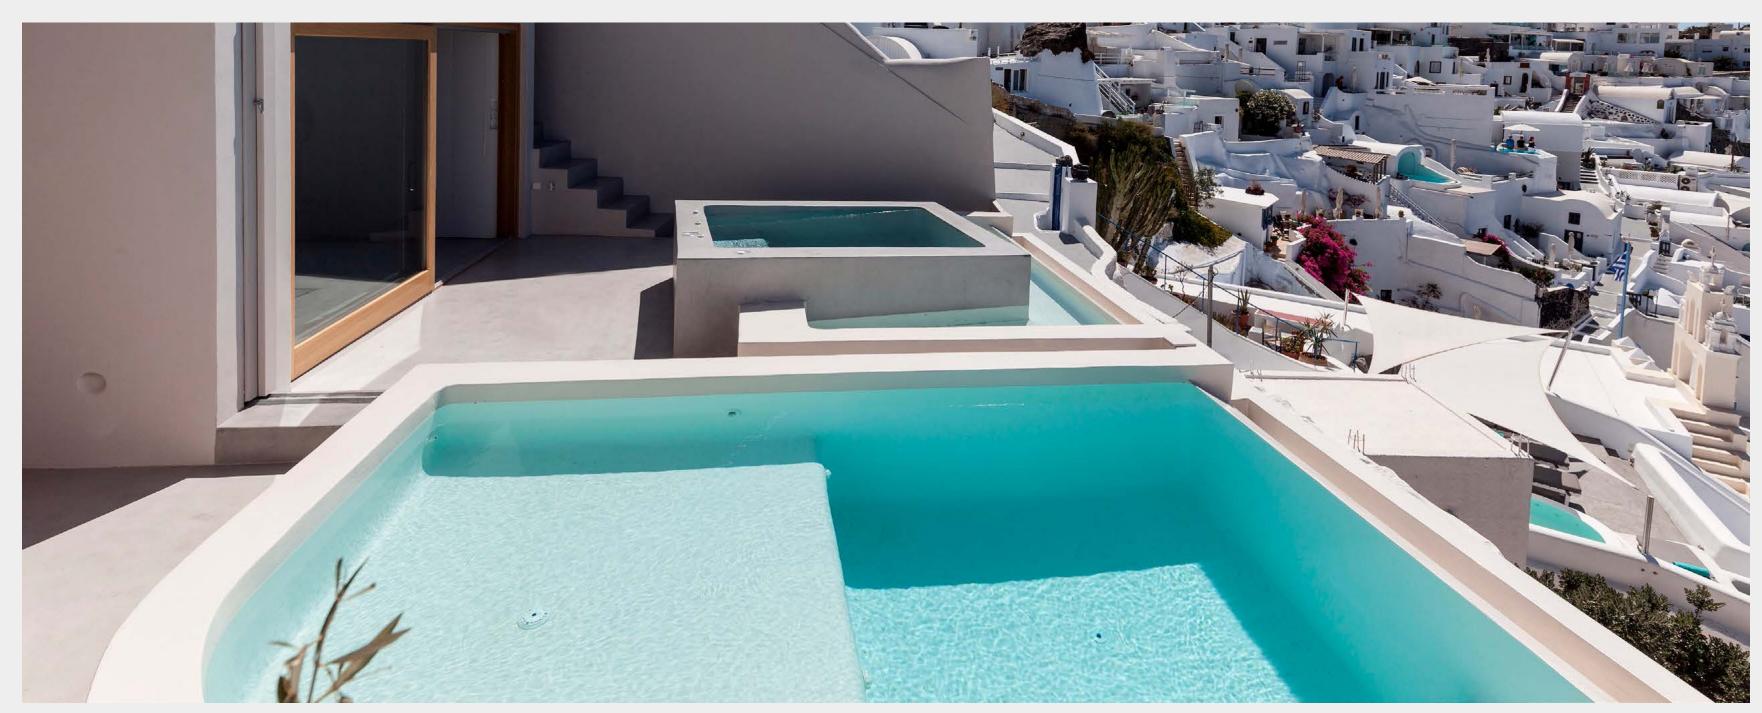

Cemher® is the place where the creation of unique rooms begins. Homes with their own personality.

SPACES WITH SOUL





A SUPERIOR QUALITY

Microröck and Micropool are microcements with unequalled performance, whose hardness is superior to that of polished cement. In addition, its resistance to compression and traction is incomparable.



Hardness & Waterproofing

Microröck vs Tradicional Microcement

LESS APPLICATION STEPS

1. MICROROCK BASE

2 coats must abe applied

2. MICROROCK/MICRONE FINE

2 coats must be applied

3. SEALER


Must be applied in at least 2 coats

Its high adhesion allows it to be applied directly, thus saving the steps of preparing the substrate (mesh, vapour barrier and bonding bridge). We also avoid the step prior to sealing (filler), thus allowing it to be applied in less time than traditional microcement.



Micropool vs Tradicional Microcement

WATER IMMERSED SURFACES

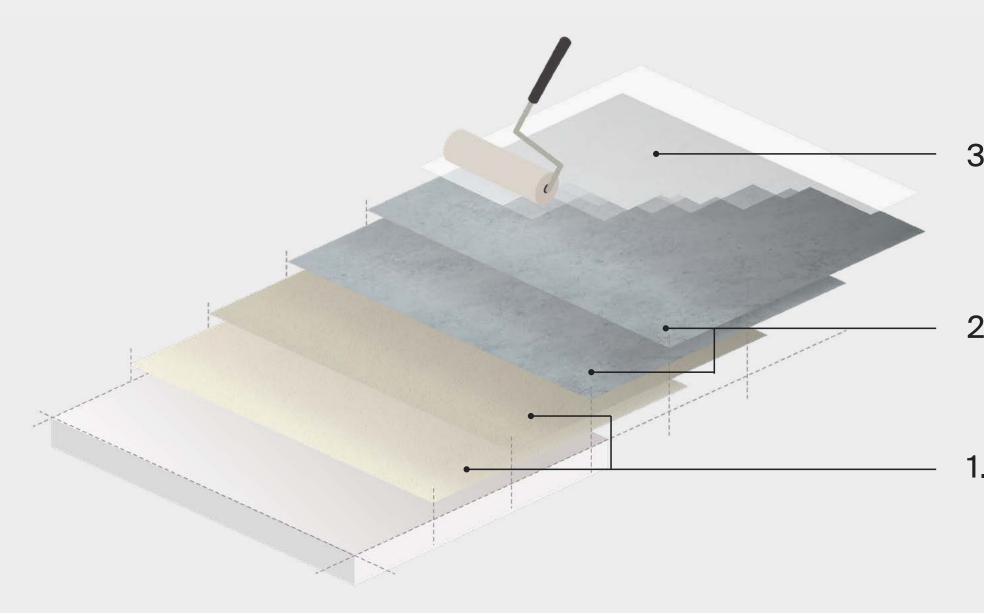

3. SEALER

Must be applied in at least 2 coats

2. MICROPOOL FINE

2 coats must be applied


I. MICROPOOL BASE


2 coats must be applied

It is specially designed for applications on surfaces immersed in water such as swimming pools. Specifically formulated to create some water vapour permeability to avoid blistering or blistering due to lack of permeability.



Thanks to its bulk waterproofing it works as a vapour barrier and is suitable for all types of surfaces. It can be used in damp areas, first floors as well as in bathrooms without fear of dampness. of any problems with dampness or defects caused by water.

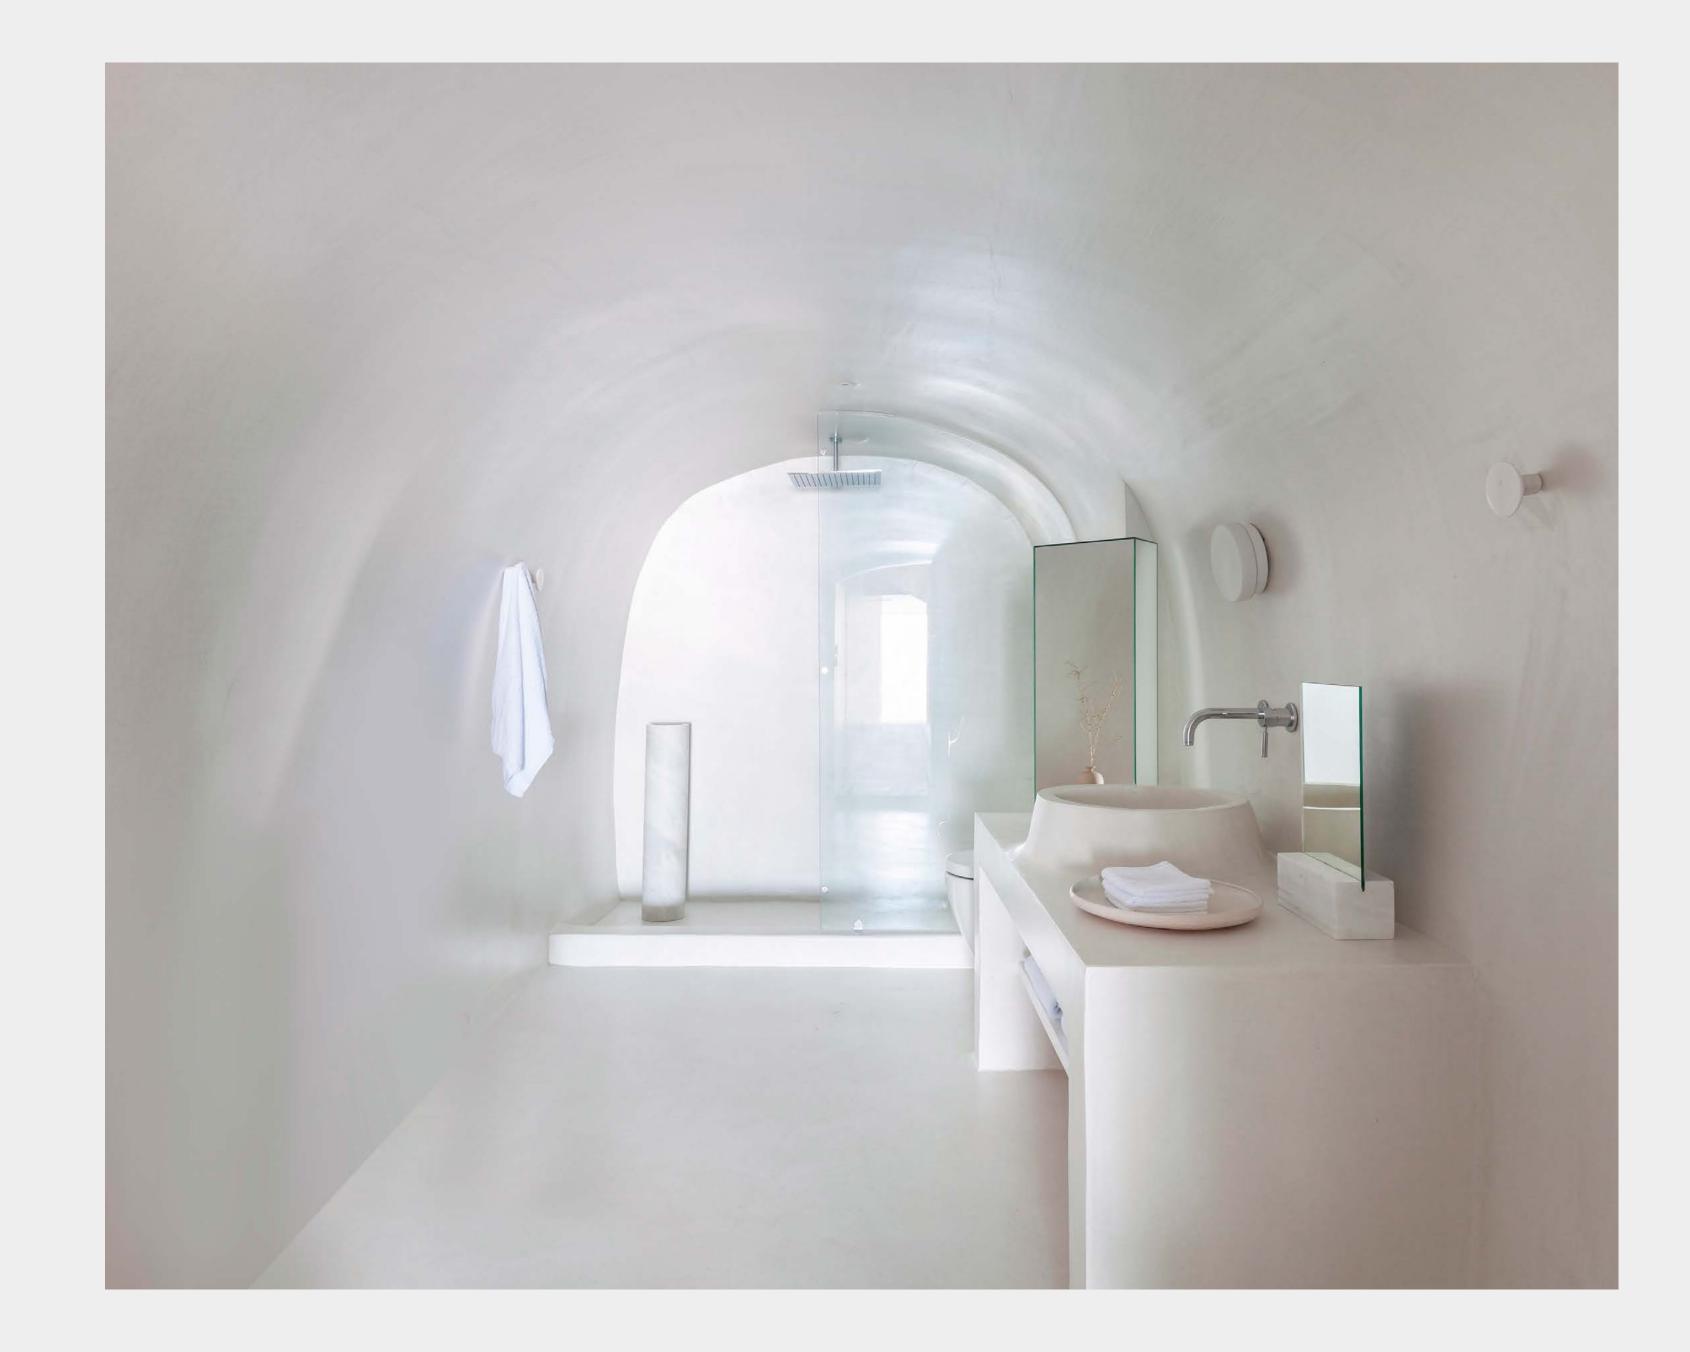

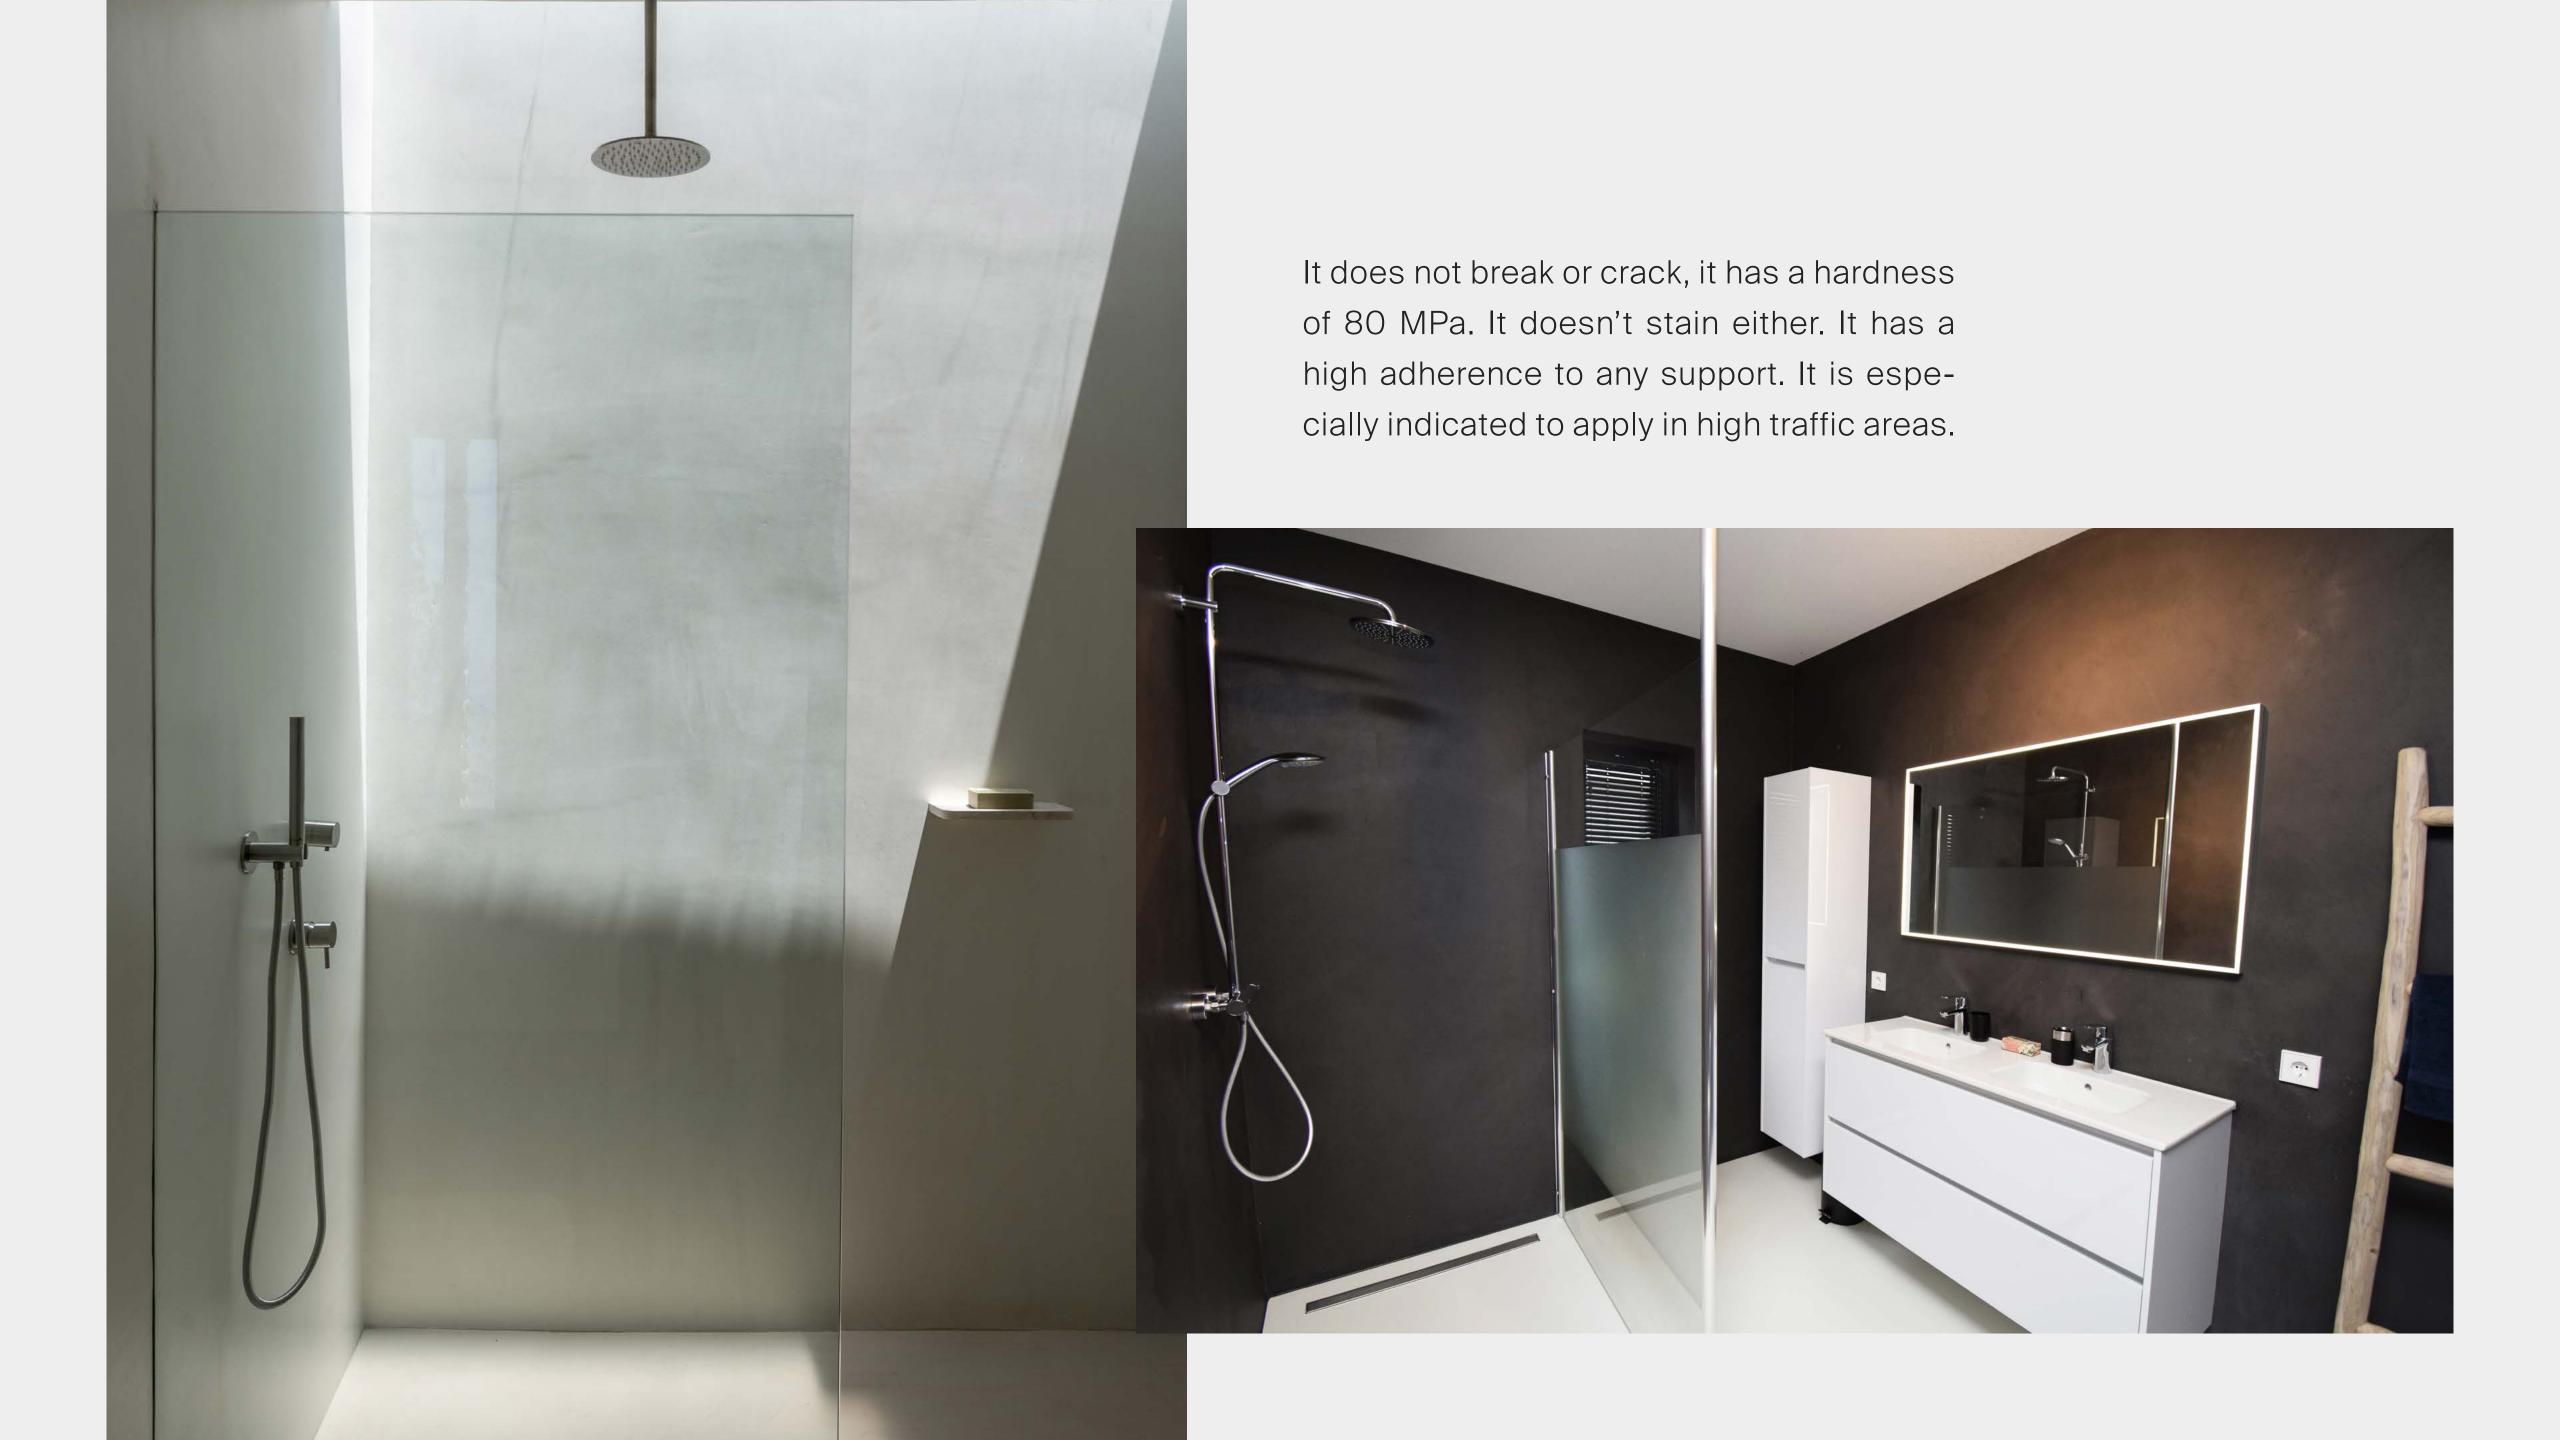





kilnhergroup®

C/ Llanterners 44 P. Ind. La Figuera 46970 Alaquas - Valencia (Spain)